




Product Datasheet

Playset PZA R10700

Aluminium round
profile
Ø89 mm

The set contains:

1. Tower with hexagonal platform with roof - 1 pcs
2. Tower with hexagonal platform without roof - 1 pcs
3. Tower with square platform without roof - 9 pcs
4. Slide h=150 cm - 1 pcs
5. Slide h=120 cm - 2 pcs
6. Slide h=90 cm - 1 pcs
7. Tube slide h= 250 cm - 1 pcs
8. Tube slide h=150 cm - 1 pcs
9. Tunnel rope bridge - 1 pcs
10. Bridge - 1 pcs
11. Chains bridge - 1 pcs
12. Tunnel bridge - 1 pcs
13. Climbing wall with stones- 2 pcs
14. Climbing wall - 2 pcs
15. Fireman's pipe with steps - 1 pcs
16. Rope Ladder - 2 pcs
17. Ladder - 2 pcs
18. Perforated balcony - 1 pcs
19. Educational panel "POX" - 1 pcs
20. Educational panel "Shop" - 1 pcs
21. Educational panel "Math" - 1 pcs
22. Educational panel "Weather" - 1 pcs
23. Side panels with crenellations, windows, milled bricks - 26 pcs
24. Entrance gate panel - 1 pcs
25. High side panels with perforated windows - 3 pcs
26. High side panels with polycarbonate windows - 3 pcs

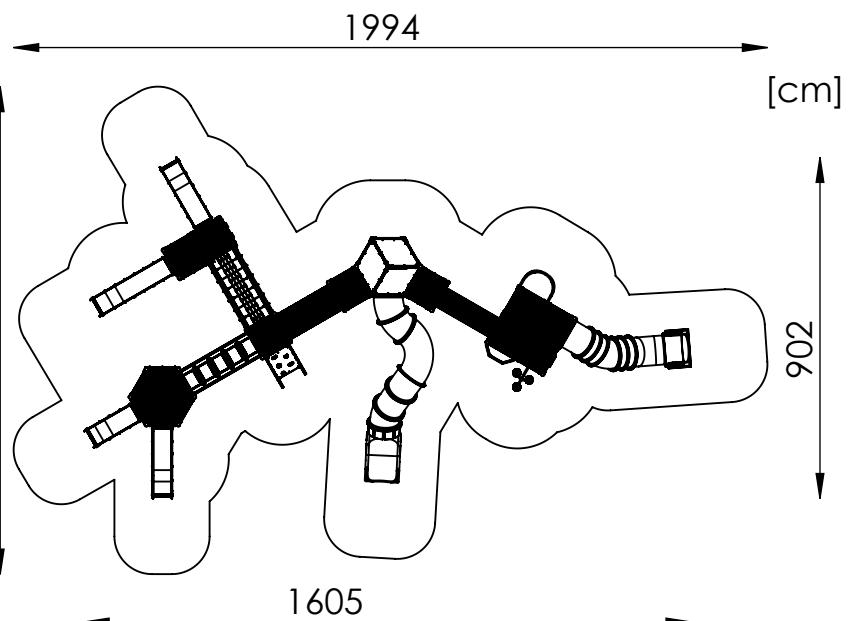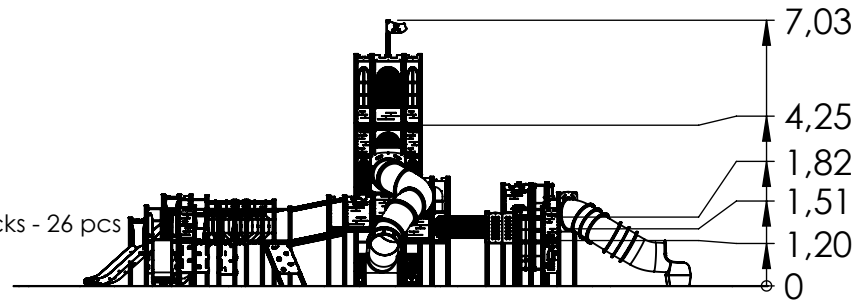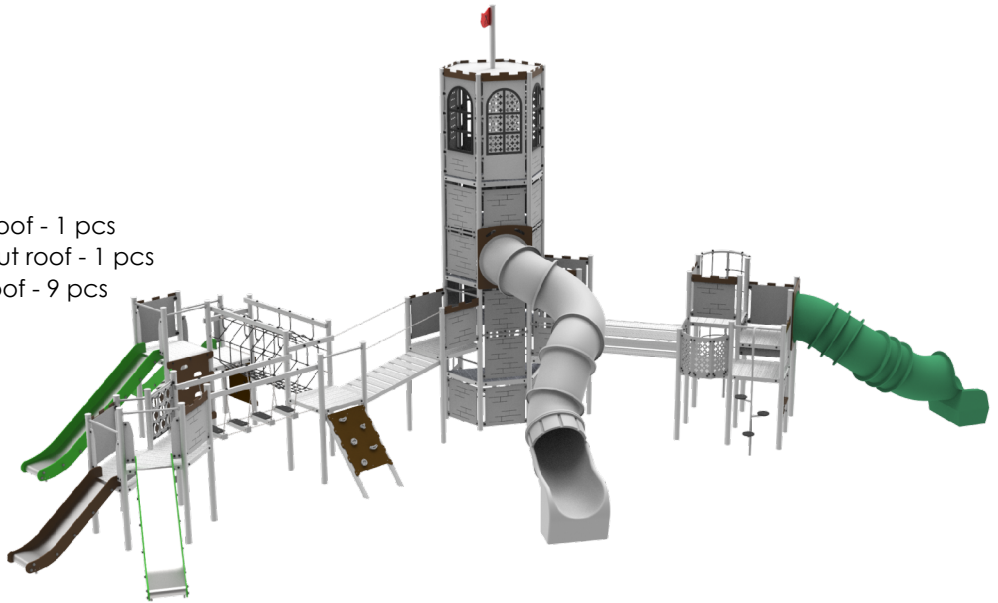

Age: 5+

Safety zone: 1289 cm x 1994 cm

Safety zone area: 133,2 m²

Free fall height: 182 cm

Spare parts availability: YES

Product compliant with PN-EN 1176-1,
PE-EN 1176-3: YES

Mounting:

The set is mounted in the ground.
Foundations made of C20/25 concrete.

In sets containing a slide, pay attention to the location in relation to the directions of the world because the sun heats the slide. The slide should not be mounted to the south.

Acceptable shock absorbing surfaces and their minimum thickness

Material ^a	Description [mm]	Minimum depth ^b [cm]	Maximum free heights of fall [cm]
Turf/topsoil		-	≤ 100 ^d
Bark	20 to 80 particle size	20	≤ 200
		30	≤ 300
Woodchip	5 to 30 particle size	20	≤ 200
		30	≤ 300
Sand or gravel ^c	0,25 to 8 grain size	20	≤ 200
		30	≤ 300
Other materials	As tested according to EN 1177		Critical fall height as tested

^a For further information on specific material properly prepared for use in children's playgrounds

^b For loose particulate material, add 100 mm to the minimum depth to compensate for displacement(see 4.2.8.5.1).

^c Sand and gravel shall be well rounded and washed to eliminate most of the silt or clay particles. Washed sand and gravel is considered to be from alluvial (natural eroded) deposits and free from most silt or clay particles. For gravel this may commonly be described as 'pea shingle'. Uniformity coefficient $D_{60}/D_{10} < 3,0$. Grain size can be identified by use of a sieve test, as in EN 933-1(see Annex G)

^d See NOTE 2 in 4.2.8.5.2