




Aluminium round
profile
Ø89 mm

Product Datasheet

Playset PZA R10050

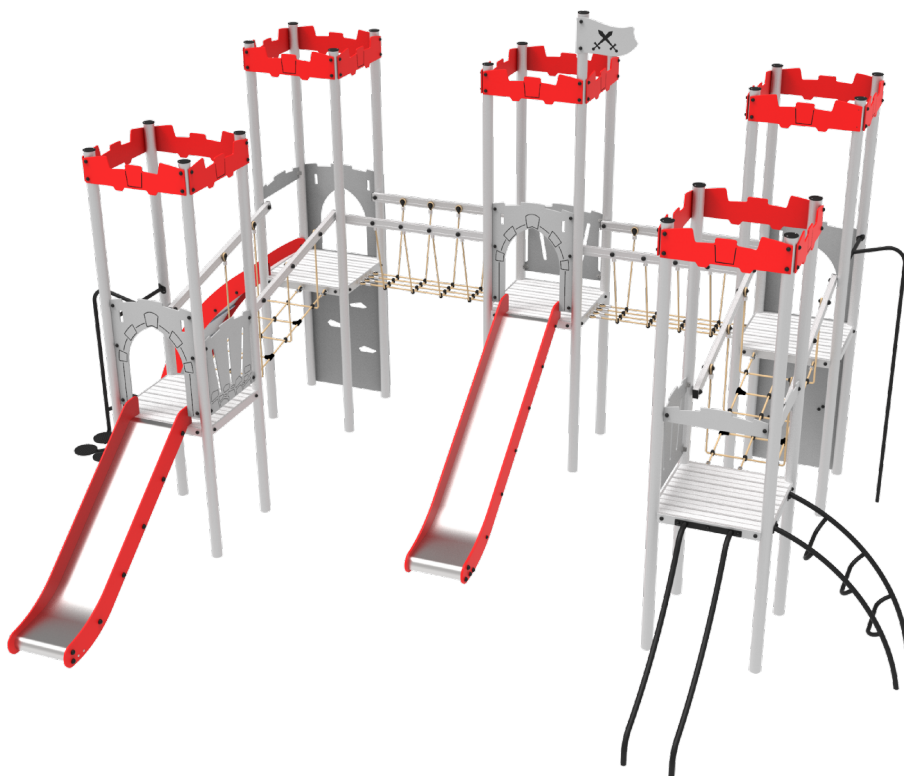

The set contains:

1. Tower with square platform with roof - 5 pcs
2. Slide h=150 cm - 1 pcs
3. Slide h=120 cm - 1 pcs
4. Slide pipe h=120 cm - 1 pcs
5. Rope bridge - 2 pcs
6. Oblique rope bridge - 2 pcs
7. Climbing wall - 2 pcs
8. Arch pipe entry h=120 cm - 1 pcs
9. Arch climbing wall - 1 pcs
10. Fireman's pipe with steps - 1 pcs
11. Fireman's pipe h=150 cm - 1 pcs

Age: 5+



Safety zone: 888 cm x 1088 cm

Safety zone area: 74,6 m²

Free fall height: 150 cm

Spare parts availability: YES

Product compliant with PN-EN 1176-1,
PE-EN 1176-3: YES

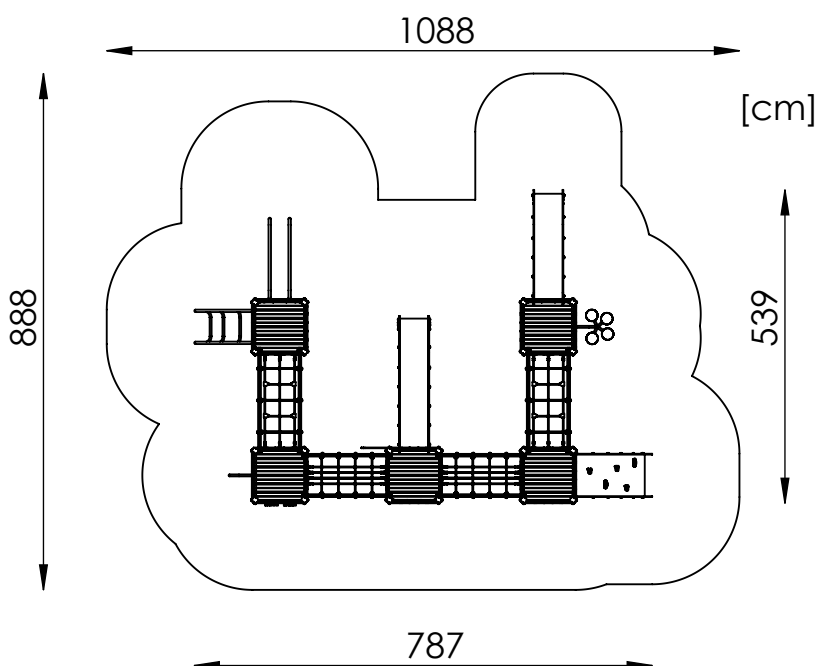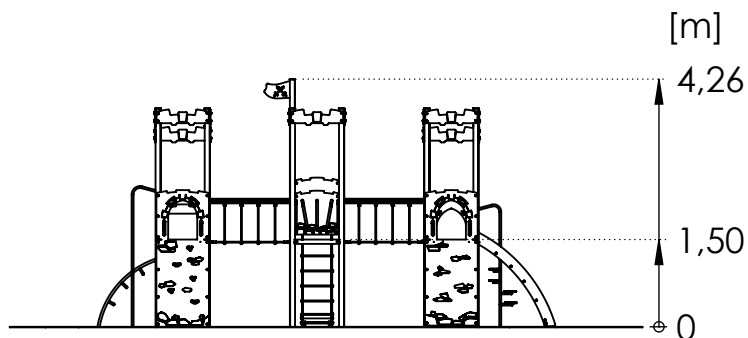

Mounting:

The set is mounted in the ground.
Foundations made of C20/25 concrete.

In sets containing a slide, pay attention to the location in relation to the directions of the world because the sun heats the slide. The slide should not be mounted to the south.

Acceptable shock absorbing surfaces and their minimum thickness

Material ^a	Description [mm]	Minimum depth ^b [cm]	Maximum free heights of fall [cm]
Turf/topsoil		-	≤ 100 ^d
Bark	20 to 80 particle size	20	≤ 200
		30	≤ 300
Woodchip	5 to 30 particle size	20	≤ 200
		30	≤ 300
Sand or gravel ^c	0,25 to 8 grain size	20	≤ 200
		30	≤ 300
Other materials	As tested according to EN 1177		Critical fall height as tested

^a For further information on specific material properly prepared for use in children's playgrounds

^b For loose particulate material, add 100 mm to the minimum depth to compensate for displacement (see 4.2.8.5.1).

^c Sand and gravel shall be well rounded and washed to eliminate most of the silt or clay particles. Washed sand and gravel is considered to be from alluvial (natural eroded) deposits and free from most silt or clay particles. For gravel this may commonly be described as 'pea shingle'. Uniformity coefficient $D_{60}/D_{10} < 3,0$. Grain size can be identified by use of a sieve test, as in EN 933-1 (see Annex G)

^d See NOTE 2 in 4.2.8.5.2