Product Datasheet

Playset PZA R1261

Aluminium round profile Ø89 mm



The set contains:

- Tower with hexagonal platform with roof - 1 pcs
- 2. Tower with square platform with roof 2 pcs
- 3. Tower with square platform without roof 2 pcs
- 4. Slide h=180 cm 1 pcs
- 5. Slide h=150 cm 1 pcs
- 6. Pipe slide h=180 cm 1 pcs
- 7. Balance Bridge 1 pcs
- 8. Oblique Arched Bridge 1 pcs
- 9. Rope Bridge 1 pcs
- 10. Rope entrance 2 pcs
- 11. Rope tunnel 1 pcs
- 12. Pipe entrance with steps 1 pcs
- 13. Firepipe Snake 1 pcs
- 14. Firepipe 1 pcs
- 15. Climbing Wall 1 pcs
- 16. Slope Climbing Wall 1 pcs
- 17. Ledder 2 pcs
- 18. Educational panel 2 pcs

Age: 5+

Safety zone: 1015 cm x 1092 cm


Safety zone area: 79,0 m²

Free fall height: 265 cm


Spare parts availability: YES

Product compliant with PN-EN 1176-1,

PE-EN 1176-3: YES

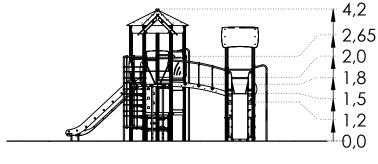

[m]

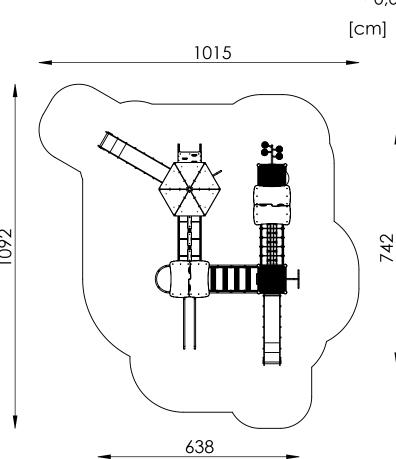



P.P.H.U. Drewnogród Robert Lis POLAND, 26-065 Piekoszów Podzamcze, ul. Źródlana 14

Mounting:

The set is mounted in the ground. Foundations made of C20/25 concrete.

In sets containing a slide, pay attention to the location in relation to the directions of the world because the sun heats the slide. The slide should not be mounted to the south.

Renders are for reference only, actual appearance may differ from the one show on the render.

Acceptable shock absorbing surfaces and their minimum thickness

Material ^a	Description [mm]	Minimum depth ^b [cm]	Maximum free heights of fall [cm]
Turf/topsoil		-	≤ 100 ^d
Bark	20 to 80 particle size	20	≤ 200
		30	≤ 300
Woodchip	5 to 30 particle size	20	≤ 200
		30	≤ 300
Sand or gravel ^c	0,25 to 8 grain size	20	≤ 200
		30	≤ 300
Other materials	As tested according to EN 1177		Critical fall height as tested

 ^a For further information on specific material properly prepared for use in children's playgrounds
 ^b For loose particulate material, add 100 mm to the minimum depht to compensate for displacement(see 4.2.8.5.1).
 ^c Sand and gravel shall be well rounded and washed to eliminate most of the silt of clay particles. Washed sand and grave lis considered to be from alluvial (natural eroded) deposits and free from most sil tor clay particles. For gravel this may commonly be described as 'pea shingle'. Uniformity coefficient D60/D10<3,0 Grain size can be indentified by use of a sieve test, as in EN 933-1(see Annex G)

^d See NOTE 2 in 4.2.8.5.2