



Product Datasheet

PZ 754 "Big Weight Rocker"

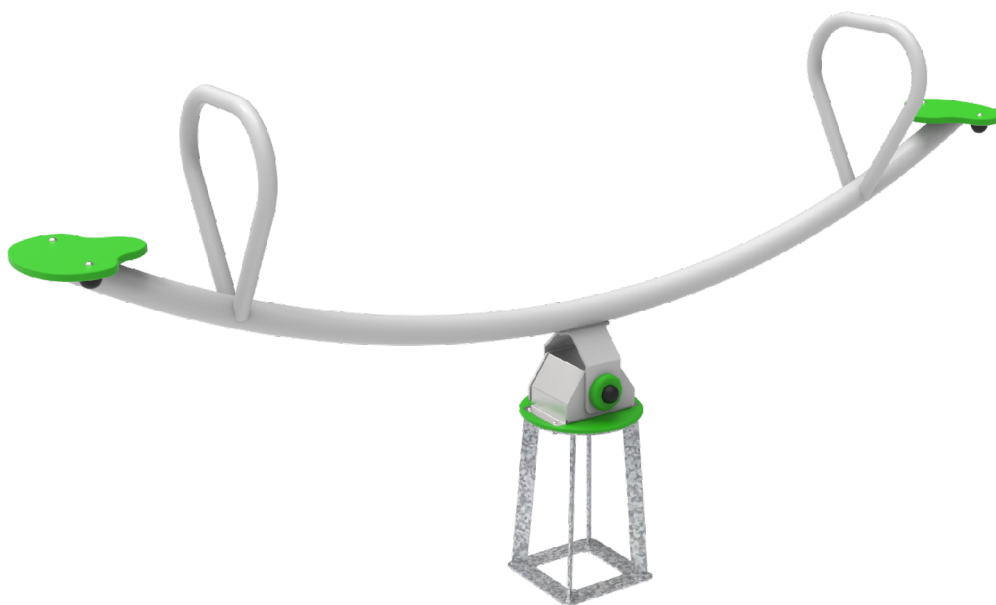

[m]

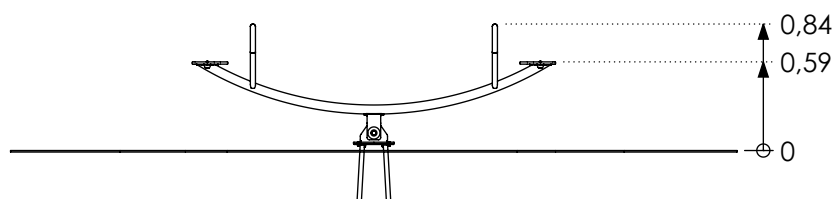

[cm]

240

Age: 3+

Amount of users: 2

Safety zone: 237 x 480 cm (10 m²)

Free fall height: 85 cm


Weight of the device: 32,8 kg

Dimension of the biggest part: 37x240x80 cm

Product compliant with PN-EN 1176-1, PN-EN 1176-6+AC: YES

Spare parts availability: YES

37

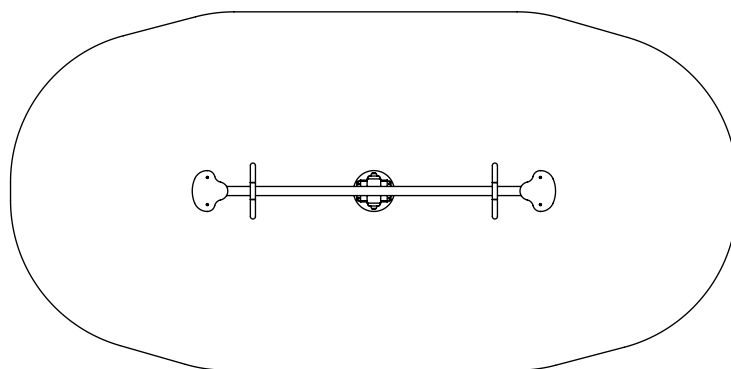

237

480

Mounting:

The set is mounted in the ground.
Foundations made of C20/25 concrete.

Material specification:

- Construction made of $\varnothing 60,3$ mm powder coated steel pipe, with zinc primer.
- The device is mounted on a flexible joint with natural rubber inserts.
- Seats made of PEHD or HPL boards.
- The front of the profiles secured by cap made from PEHD.
- Screws, bolts etc. covered by colorful plugs from plastic.

Renders are for reference only, actual appearance may differ from the one shown on the render.

Acceptable shock absorbing surfaces and their minimum thickness

Material ^a	Description [mm]	Minimum depth ^b [cm]	Maximum free heights of fall [cm]
Turf/topsoil		-	≤ 100 ^d
Bark	20 to 80 particle size	20	≤ 200
		30	≤ 300
Woodchip	5 to 30 particle size	20	≤ 200
		30	≤ 300
Sand or gravel ^c	0,25 to 8 grain size	20	≤ 200
		30	≤ 300
Other materials	As tested according to EN 1177		Critical fall height as tested

^a For further information on specific material properly prepared for use in children's playgrounds

^b For loose particulate material, add 100 mm to the minimum depth to compensate for displacement (see 4.2.8.5.1).

^c Sand and gravel shall be well rounded and washed to eliminate most of the silt of clay particles. Washed sand and gravel is considered to be from alluvial (natural eroded) deposits and free from most silt or clay particles. For gravel this may commonly be described as 'pea shingle'. Uniformity coefficient $D_{60}/D_{10} < 3,0$. Grain size can be identified by use of a sieve test, as in EN 933-1 (see Annex G)

^d See NOTE 2 in 4.2.8.5.2